




Weight: 41g (approx)

Dimensions (mm)

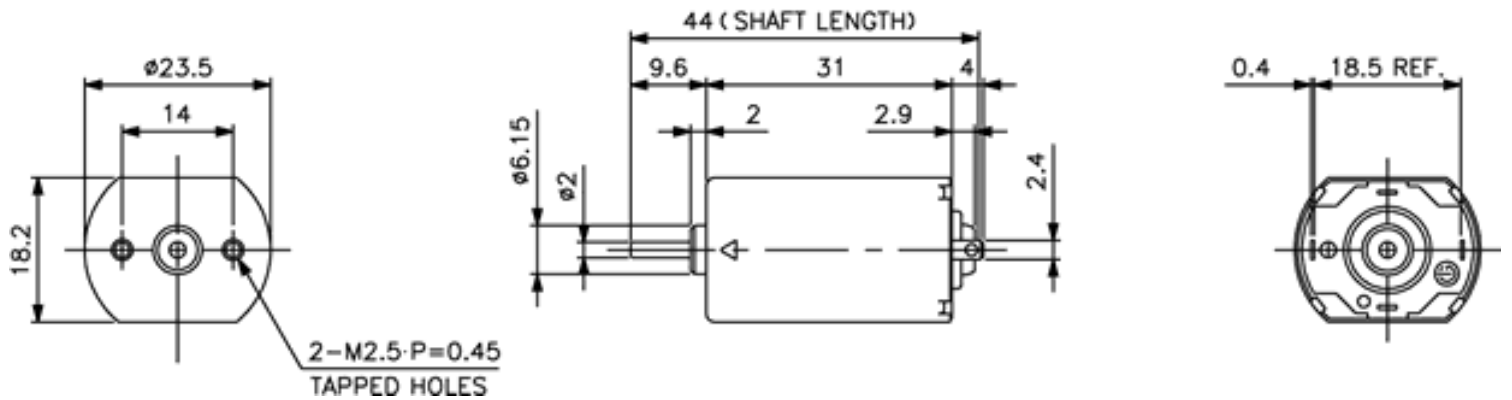

Specification

Model No.	No Load			Max Efficiency							Stall			
	Voltage	Speed	Current	Speed	Torque			Current	Output	Eff.	Torque			Current
	V	RPM	A	RPM	mN-m	g-cm	oz-in	A	W	%	mN-m	g-cm	oz-in	A
182331-032-G-5	3	8800	0.4	6900	2.93	26.9	0.41	1.37	2.12	51.6	13.6	138	1.92	4.90
182331-058-G-5	4	6200	0.16	4730	1.98	20.2	0.28	0.52	0.98	47.6	8.3	85	1.18	1.66
182331-092-G-3	4	7370	0.19	6000	2.86	29.2	0.41	0.78	1.80	57.5	15.4	157	2.18	3.39
182331-240-G-3	6	4100	0.06	3100	1.96	20.0	0.28	0.21	0.64	50.5	8.0	82	1.14	0.68
182331-108-G-5	8	6650	0.11	5080	2.67	27.3	0.38	0.35	1.43	51.1	11.3	115	1.60	1.12
182331-168-G-3	12	12000	0.12	9900	3.70	37.8	0.53	0.54	3.85	59.9	21.2	216	3.00	2.50
182331-490-G-3	24	8300	0.027	6600	2.83	28.9	0.40	0.13	1.96	60.8	13.8	141	1.96	0.55
182331-195-G-5	33	16400	0.07	13600	3.15	32.1	0.45	0.25	4.50	53.6	18.4	188	2.61	1.15

Characteristic Curves