




Weight: 60g (approx)

Dimensions (mm)

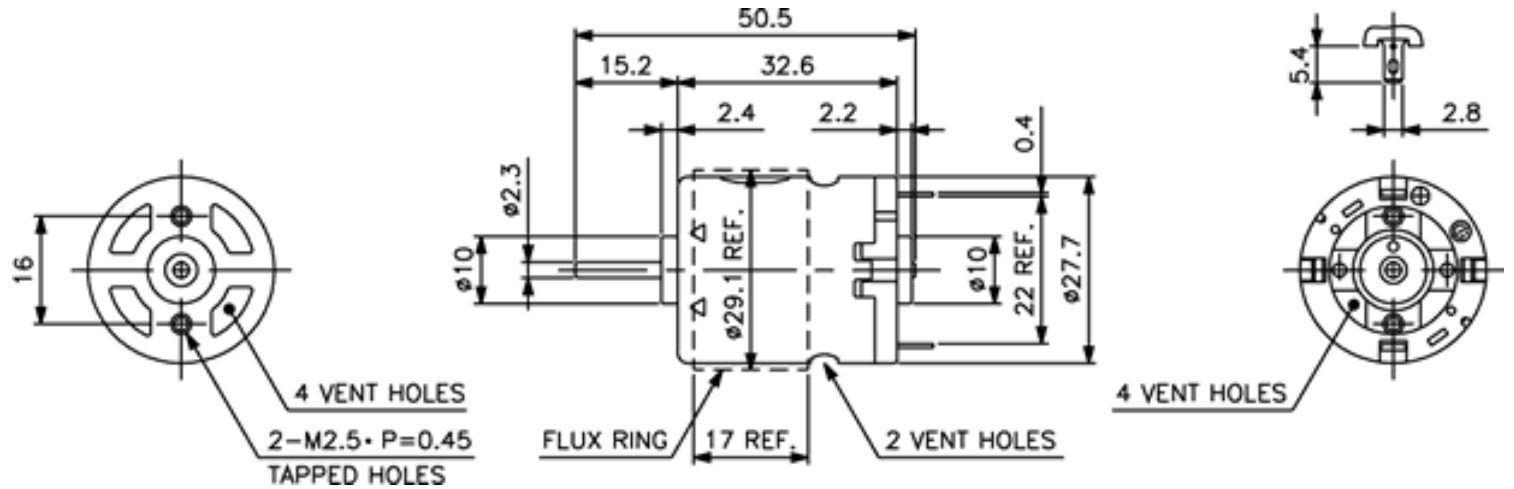

Specification

Model No.	No Load			Max Efficiency							Stall			
	Voltage	Speed	Current	Speed	Torque			Current	Output	Eff.	Torque			Current
How to read the model numbers	V	RPM	A	RPM	mN-m	g-cm	oz-in	A	W	%	mN-m	g-cm	oz-in	A
N2732-036-G-3	2.4	10200	0.7	8450	5.57	56.8	0.79	3.20	4.94	64.3	32.4	331	4.60	15.3
N2732-075-G-3	3.6	6950	0.2	6000	3.19	32.5	0.45	0.93	2.01	60.0	23.3	238	3.31	5.55
N2732-074-G-3	5	10200	0.37	8400	5.22	53.3	0.74	1.58	4.61	58.3	29.6	302	4.19	7.23
N2732-130-G-5	9	5750	0.115	4500	3.15	32.2	0.45	0.37	1.49	44.7	14.5	148	2.06	1.29
N2732-305-G-5	12	3000	0.037	2250	1.74	17.8	0.25	0.09	0.41	37.0	7.0	71	0.99	0.26
N2732-157-G-5	24	13950	0.08	11400	5.37	54.8	0.76	0.41	6.44	65.6	29.4	300	4.17	1.88
N2732-250-G-5	24	8350	0.05	6600	3.41	34.8	0.48	0.19	2.37	52.9	16.3	166	2.31	0.70
N2732-315-G-5	24	6270	0.045	4850	3.42	34.9	0.48	0.15	1.74	47.2	15.1	154	2.14	0.53