




Weight:60g (approx)

**Dimensions (mm)**

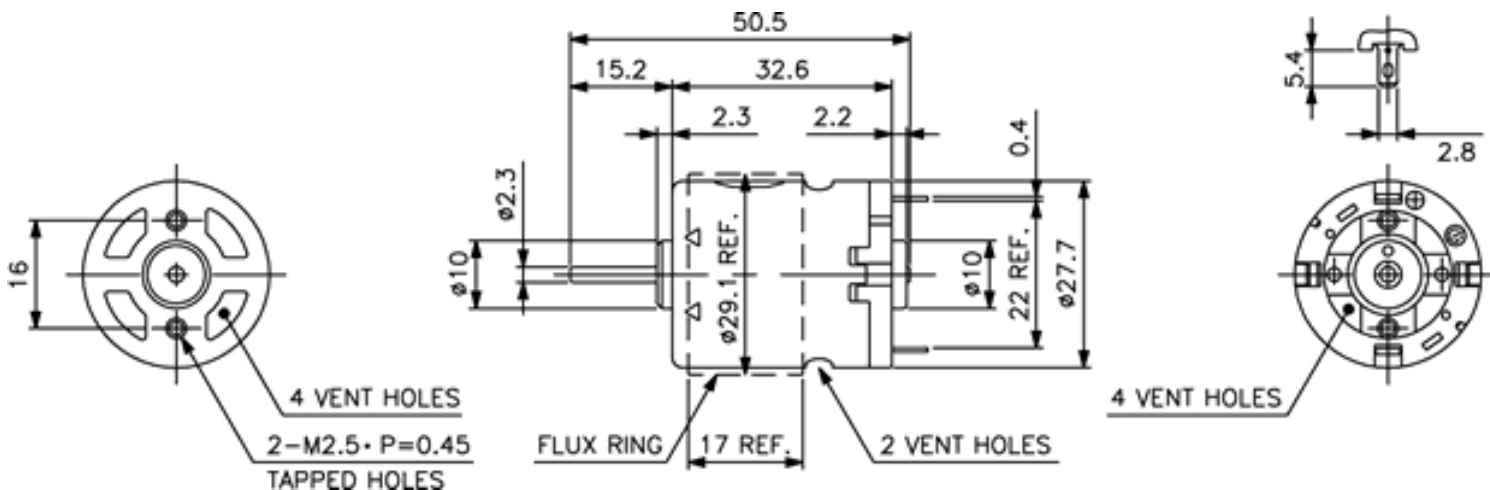

**Specification**

Model No. <a href="#">How to read the model numbers</a>	No Load			Max Efficiency							Stall			
	Voltage	Speed	Current	Speed	Torque			Current	Output	Eff.	Torque			Current
	V	RPM	A	RPM	mN-m	g-cm	oz-in	A	W	%	mN-m	g-cm	oz-in	A
NN2732-050-G-3	2.4	7000	0.4	5750	4.17	42.5	0.59	1.81	2.52	57.9	23.3	238	3.31	8.30
NN2732-063-G-3	6	14000	0.35	11700	5.84	59.6	0.83	1.83	7.19	65.5	35.6	363	5.04	9.35
NN2732-076-G-5	12	13100	0.18	10900	5.55	56.6	0.79	0.87	6.35	61.2	33.0	337	4.68	4.26
NN2732-190-G-5	12	5200	0.07	4000	3.19	32.5	0.45	0.22	1.34	51.3	13.8	141	1.96	0.71
NN2732-110-G-3	13.5	18200	0.25	15800	7.19	73.3	1.02	1.29	11.9	68.4	54.5	556	7.72	8.15
NN2732-157-G-3	24	23000	0.17	19600	8.00	81.6	1.13	1.02	16.5	67.0	54.1	552	7.67	5.95
NN2732-200-G-5	24	9900	0.06	7800	3.89	39.7	0.55	0.25	3.19	53.8	18.3	187	2.60	0.94
NN2732-510-G-5	30	4650	0.024	3370	2.86	29.2	0.41	0.08	1.01	41.0	10.4	106	1.47	0.24