




Weight: 70g (approx)

**Dimensions (mm)**

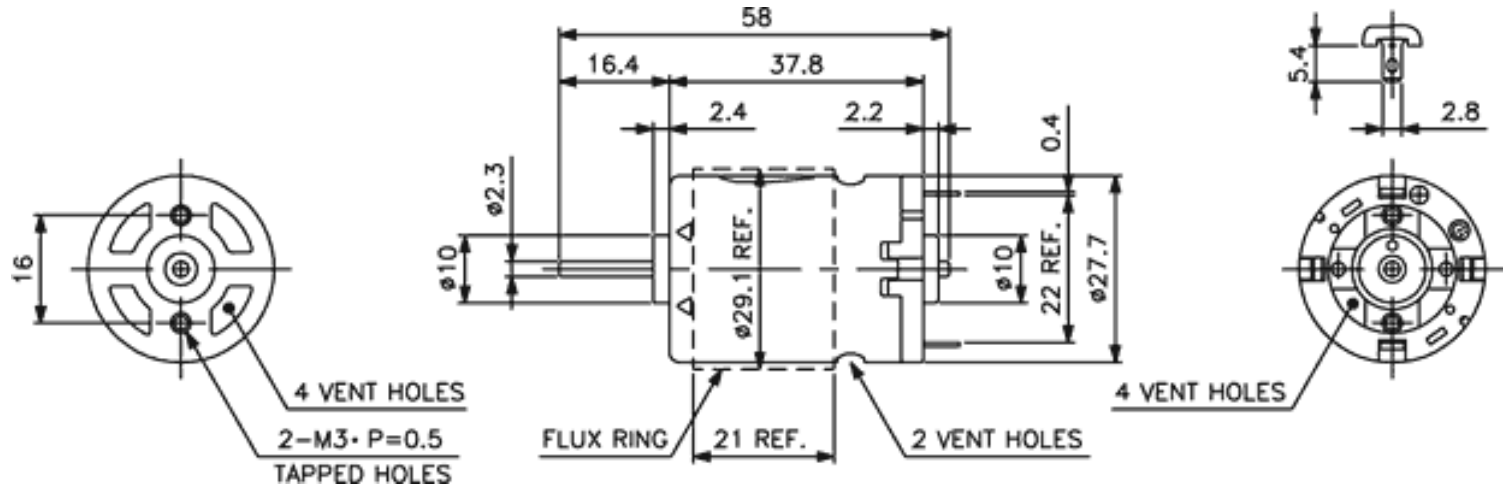

**Specification**

Model No.	No Load			Max Efficiency							Stall			
	Voltage	Speed	Current	Speed	Torque			Current	Output	Eff.	Torque			Current
	V	RPM	A	RPM	mN-m	g-cm	oz-in	A	W	%	mN-m	g-cm	oz-in	A
N2738-016-GF-3	2.4	16700	1.75	13600	9.82	100	1.39	8.99	14.0	65.1	52.9	540	7.50	40.8
N2738-083-G-3	3.6	5000	0.32	3850	4.55	46.5	0.65	0.97	1.84	52.6	19.8	202	2.81	3.16
N2738-035-G-3	4.8	15400	0.8	13000	10.7	109	1.51	4.73	14.6	64.2	68.4	698	9.69	26.0
N2738-048-G-3	6	14400	0.5	12400	6.94	708	0.98	2.39	9.05	63.1	50.0	510	7.08	14.1
N2738-051-G-5	12	14900	0.3	13000	8.37	85.4	1.19	1.43	11.4	66.7	65.7	670	9.31	9.15
N2738-114-G-3	12	11400	0.16	9850	7.02	71.7	1.00	0.90	7.27	67.3	51.6	527	7.32	5.60
N2738-155-G-5	24	990	0.06	8400	5.88	60.0	0.83	0.33	5.19	65.0	38.8	396	5.50	1.86
N2738-160-GF-3	24	15400	0.15	13400	11.4	116	1.61	0.96	16.0	69.8	87.5	893	12.4	6.35