




Weight: XXg (approx)

Dimensions (mm)

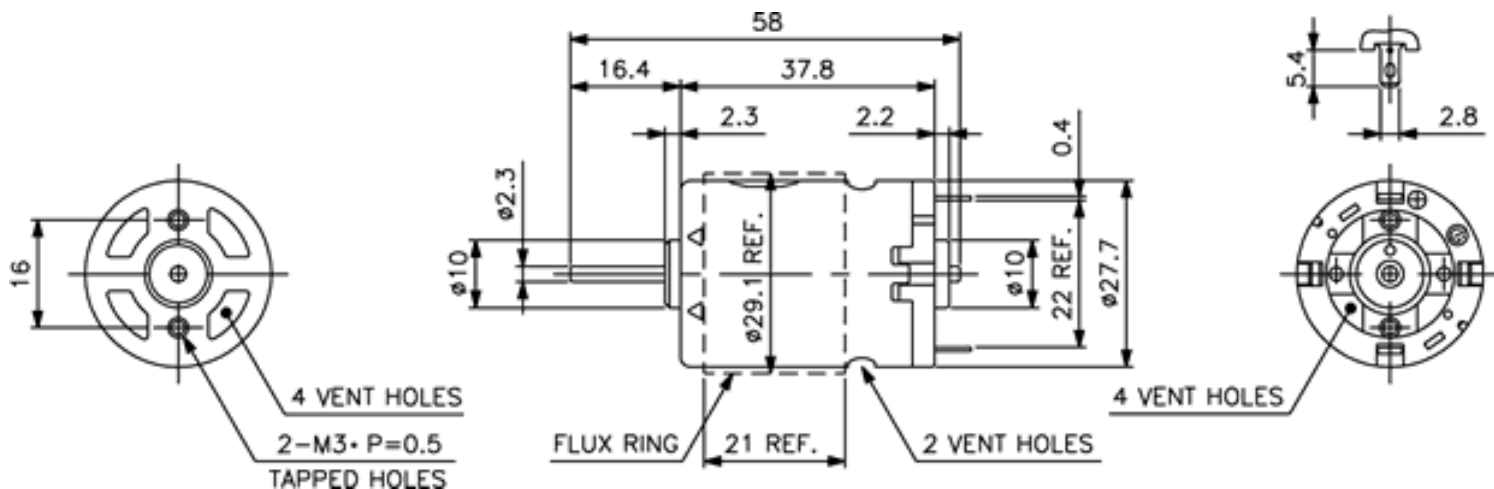

Specification

| Model No. | No Load | | | Max Efficiency | | | | | | | Stall | | | |
|-----------------|---------|-------|---------|----------------|--------|------|-------|---------|--------|------|--------|------|-------|---------|
| | Voltage | Speed | Current | Speed | Torque | | | Current | Output | Eff. | Torque | | | Current |
| | V | RPM | A | RPM | mN-m | g-cm | oz-in | A | W | % | mN-m | g-cm | oz-in | A |
| NN2738-015-G-3 | 2.4 | 16100 | 1.5 | 13400 | 9.14 | 93.2 | 1.30 | 8.38 | 12.9 | 64.0 | 54.5 | 556 | 7.72 | 42.5 |
| NN2738-043-GF-3 | 6 | 14900 | 0.5 | 13100 | 11.31 | 115 | 1.60 | 3.71 | 15.6 | 69.9 | 93.6 | 955 | 13.3 | 27.1 |
| NN2738-075-G-3 | 9.6 | 14350 | 0.35 | 12150 | 9.09 | 92.8 | 1.29 | 1.87 | 11.6 | 64.7 | 69.3 | 605 | 8.40 | 10.3 |
| NN2738-095-G-5 | 12 | 7950 | 0.11 | 6400 | 6.13 | 62.6 | 0.87 | 0.57 | 4.13 | 59.9 | 31.5 | 321 | 4.46 | 2.49 |
| NN2738-160-GF-3 | 18 | 11700 | 0.125 | 10100 | 8.68 | 88.6 | 1.23 | 0.75 | 9.22 | 68.5 | 63.5 | 648 | 9.00 | 4.68 |
| NN2738-450-G-3 | 19 | 4500 | 0.035 | 3650 | 4.26 | 43.4 | 0.60 | 0.15 | 1.63 | 57.2 | 22.5 | 230 | 3.19 | 0.65 |
| NN2738-218-GF-5 | 24 | 6000 | 0.055 | 4700 | 5.44 | 55.5 | 0.77 | 0.21 | 2.69 | 54.1 | 25.1 | 256 | 3.56 | 0.76 |
| NN2738-270-GF-3 | 24 | 8950 | 0.07 | 7600 | 6.87 | 70.1 | 0.97 | 0.36 | 5.49 | 64.4 | 45.6 | 465 | 6.46 | 1.96 |