




Weight: 82g (approx)

Dimensions (mm)

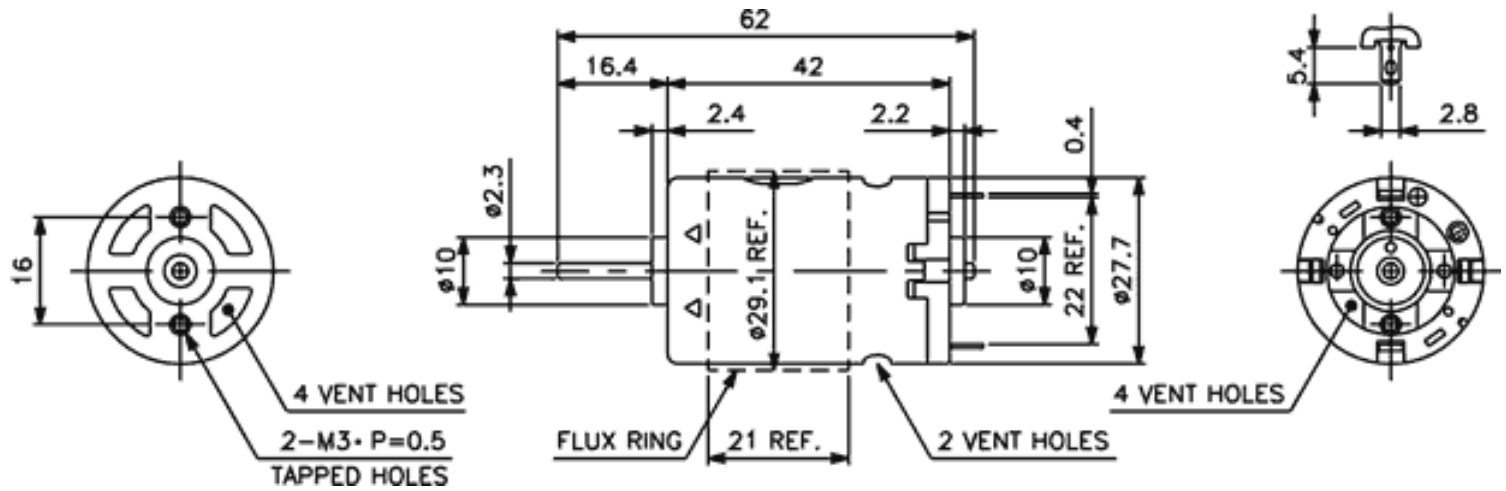

Specification

Model No.	No Load			Max Efficiency							Stall			
	Voltage	Speed	Current	Speed	Torque			Current	Output	Eff.	Torque			Current
How to read the model numbers	V	RPM	A	RPM	mN-m	g-cm	oz-in	A	W	%	mN-m	g-cm	oz-in	A
N2742-024-G-3	2.4	9300	0.7	7350	6.62	67.5	0.94	3.57	5.11	59.6	31.6	322	4.47	14.4
N2742-013-GF-5	6	2110	1.0	17900	9.88	101	1.40	4.76	18.6	65.1	65.2	665	9.24	25.8
N2742-034-G-5	6	9400	0.225	7950	7.04	71.9	1.00	1.52	5.89	64.5	45.7	466	6.47	8.63
N2742-062-G-5	12	10100	0.13	8400	7.88	80.5	1.12	0.87	6.96	66.4	46.8	478	6.64	4.55
N2742-100-GF-5	12	5700	0.08	4700	5.64	57.5	0.80	0.38	2.79	60.8	32.1	328	4.56	1.80
N2742-057-GF-5	24	21100	0.2	17900	12.5	128	1.77	1.46	23.5	67.4	82.5	842	11.7	8.48
N2742-098-GF-5	24	11500	0.1	10050	8.09	82.6	1.15	0.52	8.55	68.0	64.2	655	9.10	3.46
N2742-300-GF-3	24	6850	0.045	5780	8.01	81.8	1.14	0.29	4.86	70.7	51.1	521	7.24	1.59