




Weight: 45g (approx)

Dimensions (mm)

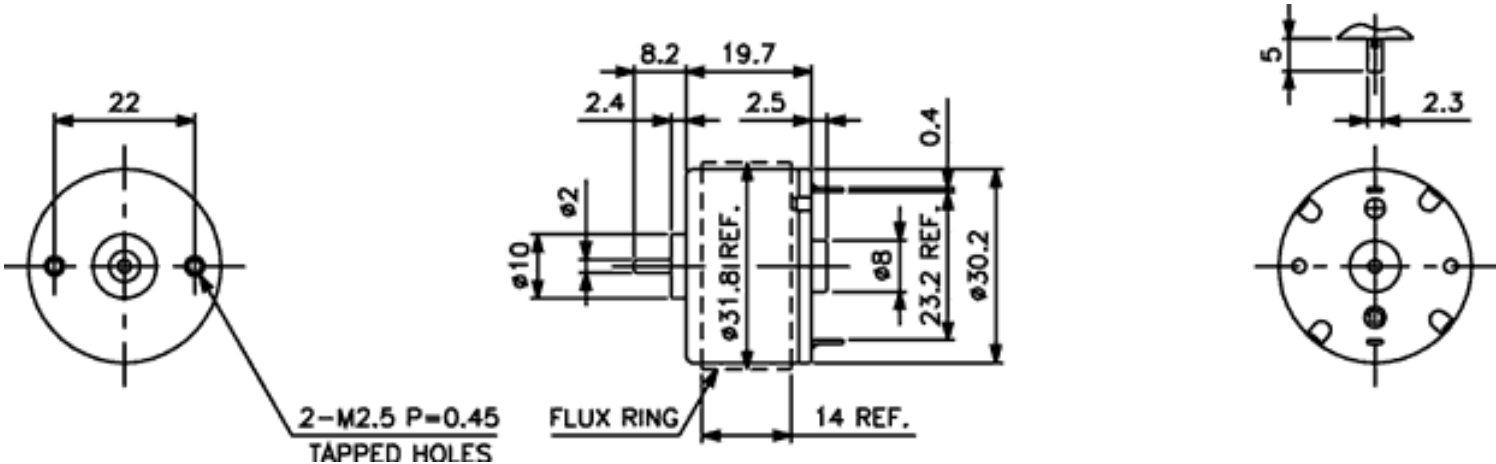

Specification

Model No. How to read the model numbers	No Load			Max Efficiency							Stall			
	Voltage	Speed	Current	Speed	Torque			Current	Output	Eff.	Torque			Current
	V	RPM	A	RPM	mN-m	g-cm	oz-in	A	W	%	mN-m	g-cm	oz-in	A
3020-048-G-3	2.4	10250	0.4	8400	2.58	26.4	0.37	1.77	2.28	53.6	14.3	146	2.03	8.00
3020-115-G-3	6	10600	0.15	9150	3.51	35.8	0.50	0.90	3.38	62.9	25.7	262	3.64	5.60
3020-180-G-3	8	8600	0.08	7400	2.83	28.9	0.40	0.44	2.20	62.5	20.3	207	2.88	2.66
3020-430-G-3	12	6350	0.038	5180	1.84	18.8	0.26	0.17	1.00	48.1	9.9	102	1.41	0.77
3020-505-G-3	12	5050	0.038	4130	1.63	16.7	0.23	0.11	0.71	52.4	8.9	91	1.26	0.45
3020-615-G-3	12	4200	0.019	3380	1.44	14.7	0.20	0.08	0.51	56.8	7.4	75	1.04	0.31
3020-710-G-3	12	2530	0.017	1910	1.08	11.0	0.15	0.05	0.22	38.0	4.4	45	0.63	0.14
3020-790-G-3	24	3680	0.008	2950	1.30	13.2	0.18	0.03	0.40	52.9	6.6	67	0.93	0.13