




Weight: 630g (approx)

Dimensions (mm)

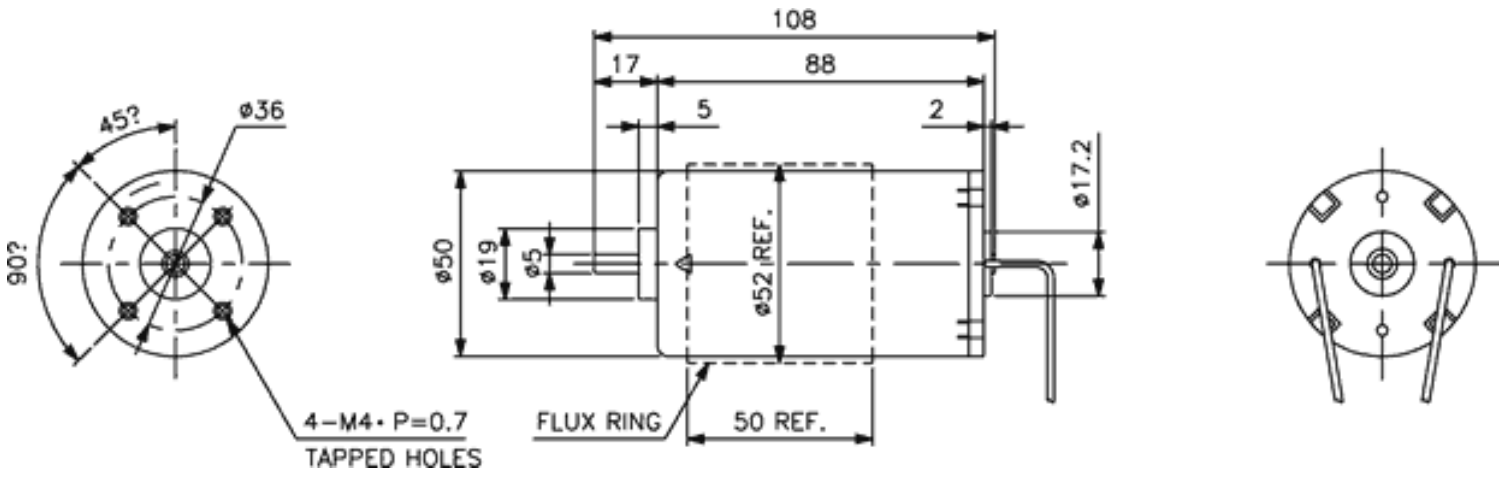

Specification

Model No.	No Load			Max Efficiency							Stall			
	Voltage	Speed	Current	Speed	Torque			Current	Output	Eff.	Torque			Current
	V	RPM	A	RPM	mN-m	g-cm	oz-in	A	W	%	mN-m	g-cm	oz-in	A
5088-013-GF-7	12	7800	1.0	7000	88.2	900	12.5	7.21	64.9	75.0	860	8770	122	61.5
5088-016-GF-7	12	6550	0.5	5520	94.3	962	13.4	5.82	54.7	78.2	598	6100	84.7	34.3
5088-021-GF-7	12	4830	0.4	4330	63.8	651	9.04	3.12	29.0	77.6	615	6280	87.2	26.6
5088-027-GF-7	12	3630	0.4	3180	68.4	698	9.70	2.63	22.8	72.2	551	5630	78.1	18.4
5088-048-GF-7	19	3200	0.15	2830	54.4	555	7.71	1.13	16.2	75.2	470	4800	66.7	8.65
5088-033-GF-7	24	6400	0.25	5530	85.1	868	12.1	2.57	49.4	80.0	622	6350	88.2	17.3
5088-043-GF-7	24	4680	0.15	4200	59.2	605	8.40	1.42	26.2	76.7	583	5950	82.6	12.7
5088-187-GF-7	24	1020	0.04	850	28.25	291	4.04	0.17	2.55	60.7	175	1790	24.9	0.87