




Weight: 630g (approx)

Dimensions (mm)

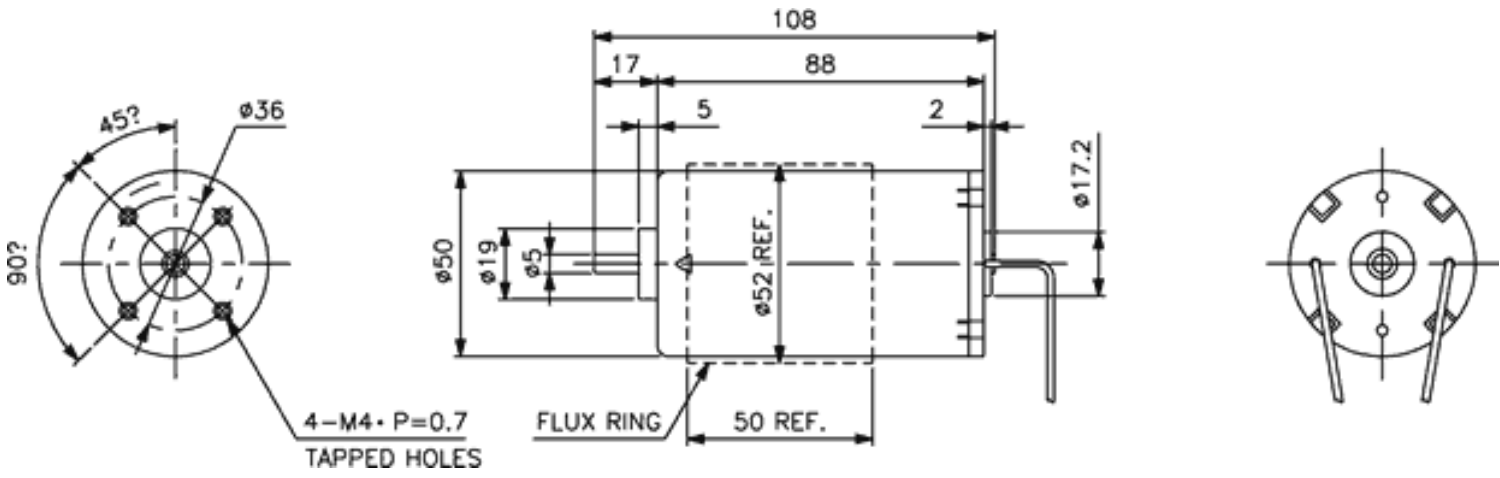

Specification

| Model No. | No Load | | | Max Efficiency | | | | | | | Stall | | | |
|---------------|---------|-------|---------|----------------|--------|------|-------|---------|--------|------|--------|------|-------|---------|
| | Voltage | Speed | Current | Speed | Torque | | | Current | Output | Eff. | Torque | | | Current |
| | V | RPM | A | RPM | mN-m | g-cm | oz-in | A | W | % | mN-m | g-cm | oz-in | A |
| 5088-013-GF-7 | 12 | 7800 | 1.0 | 7000 | 88.2 | 900 | 12.5 | 7.21 | 64.9 | 75.0 | 860 | 8770 | 122 | 61.5 |
| 5088-016-GF-7 | 12 | 6550 | 0.5 | 5520 | 94.3 | 962 | 13.4 | 5.82 | 54.7 | 78.2 | 598 | 6100 | 84.7 | 34.3 |
| 5088-021-GF-7 | 12 | 4830 | 0.4 | 4330 | 63.8 | 651 | 9.04 | 3.12 | 29.0 | 77.6 | 615 | 6280 | 87.2 | 26.6 |
| 5088-027-GF-7 | 12 | 3630 | 0.4 | 3180 | 68.4 | 698 | 9.70 | 2.63 | 22.8 | 72.2 | 551 | 5630 | 78.1 | 18.4 |
| 5088-048-GF-7 | 19 | 3200 | 0.15 | 2830 | 54.4 | 555 | 7.71 | 1.13 | 16.2 | 75.2 | 470 | 4800 | 66.7 | 8.65 |
| 5088-033-GF-7 | 24 | 6400 | 0.25 | 5530 | 85.1 | 868 | 12.1 | 2.57 | 49.4 | 80.0 | 622 | 6350 | 88.2 | 17.3 |
| 5088-043-GF-7 | 24 | 4680 | 0.15 | 4200 | 59.2 | 605 | 8.40 | 1.42 | 26.2 | 76.7 | 583 | 5950 | 82.6 | 12.7 |
| 5088-187-GF-7 | 24 | 1020 | 0.04 | 850 | 28.25 | 291 | 4.04 | 0.17 | 2.55 | 60.7 | 175 | 1790 | 24.9 | 0.87 |