



# DC Motors

## EN22 series


- 5-slot armature for low cogging
- High grade magnet for high power output
- Matching gear heads & encoders available as options

### Representative applications


- Transport mechanism for cards or bills
- Pan/tilt mechanism for surveillance cameras
- Paper handling mechanism for printers

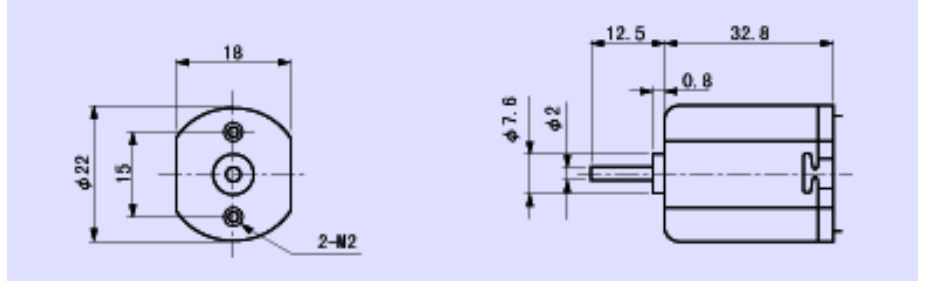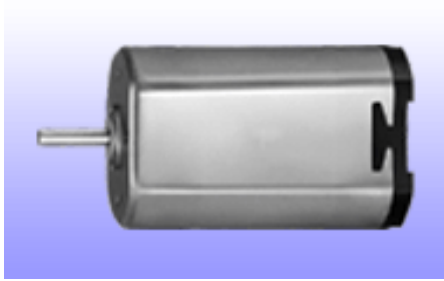

EN22 12V type

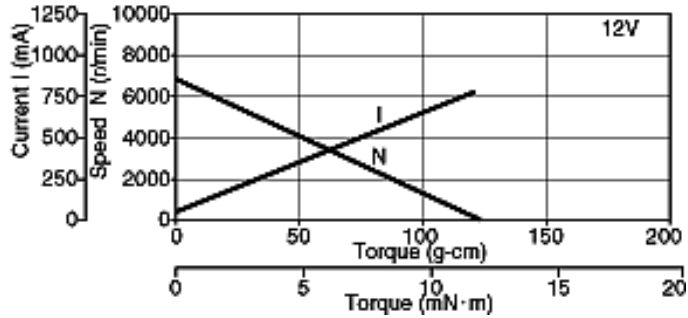

EN22 24V type

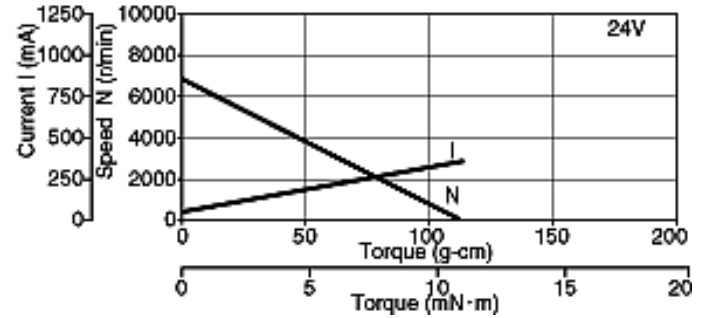

			EN22	
Voltage		V	12	24
R a t e d	Power output	W	1.4	1.4
	Torque	mN·m	2.45	2.45
		g-cm	25	25
	Speed	r/min	5,400	5,400
	Current	mA	180	90
N o l o a d	Speed	r/min	7,000	6,900
	Current	mA	30	15
Starting torque		mN·m	10.3	10.8
		g-cm	105	110
Torque constant		mN·m/A	16.1	32.7
		g-cm/A	164	333