


COR-150

《Specifications》

Supply voltage	D.C. 5V $\pm 10\%$
Pulse per revolution	144P/R
Output level	TTL
Logic width	S=90° e $\pm 15e$
1 cycle width	T
Index pulse width	180° e x 2
Periodic fluctuation	$\Delta T/T \times 100 \leq 10\%P-P$
Duty ratio	30~70%
Max. frequency response	30KHz

《Output signal form》

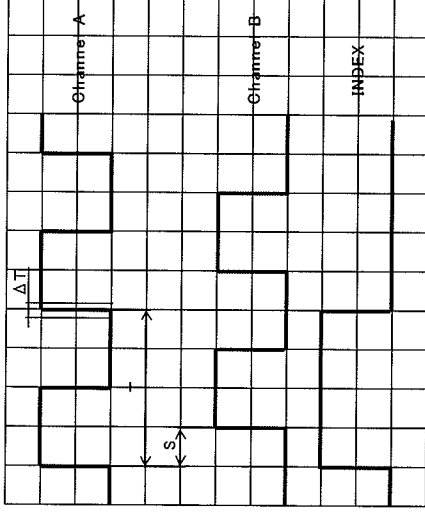

- 1 ChannelA
- 2 ChannelB
- 3 GND
- 4 Vcc(5V)
- 5 Index

《Applicable motors》

- Best match with motors with versatile DN26s (3 slot, iron-core motor).
- The line-up to be expanded.

《The example with a DN26 motor》

